



6565 Rainforest




6566 Henna

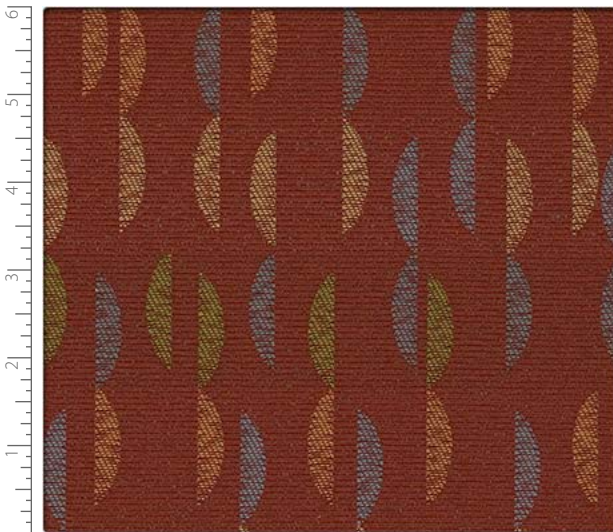

6567 Paprika

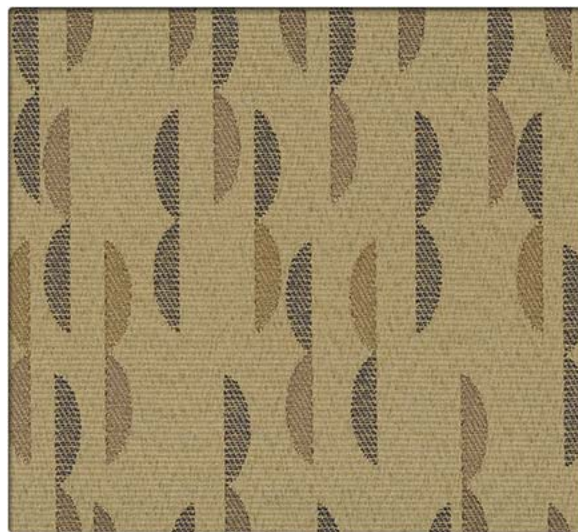

6568 Rattan

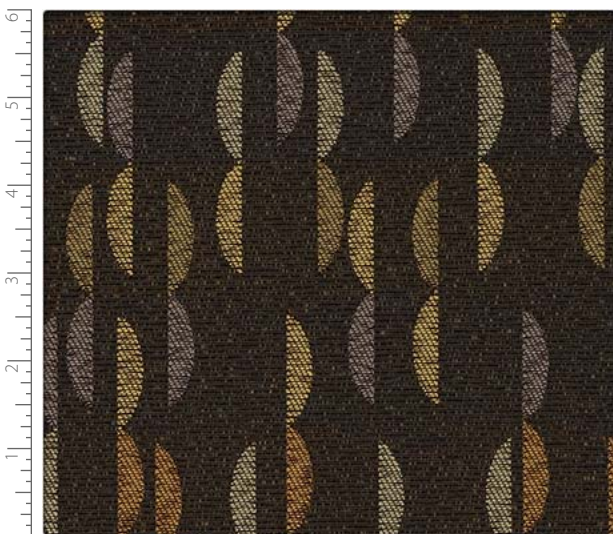

6573 Obsidian



6570 Chianti






6571 Marsh



6572 Pacific

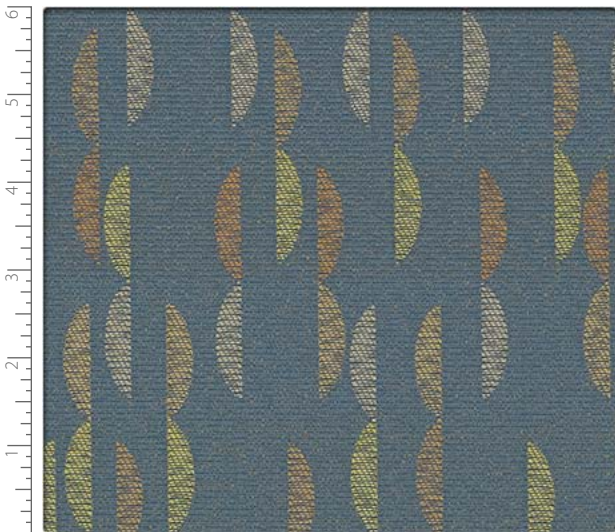

6569 Lagoon

# Arc

## PERFORMANCE FABRIC

Grade Call for Pricing

### Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Contains an antimicrobial agent

### Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

For additional cleaning information visit [cfstinson.com](http://cfstinson.com)

For complete specifications visit [cfstinson.com](http://cfstinson.com)

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

### Specifications



|           |  |
|-----------|--|
| Content   | 65% Post-Industrial Recycled Polyester, 35% Post-Consumer Recycled Polyester |
| Finish    | INCASE soil and stain protection   |
| Backing   | Polyester  |
| Weight    | 11.2 oz./lin. yd. ± 1.0 oz.  |
| Width     | 54 inches  |
| Repeat    | Horizontal: 7.5 inches, Vertical: 10.8 inches, directional                   |
| Roll Size | 55 yards   |

### Performance Characteristics

|                                 |   |
|---------------------------------|---|
| Abrasion Resistance ASTM D-4157 | Exceeds 51,000 double rubs - heavy duty   |
| Break Strength ASTM D-5034      | Warp: 100 lbs. min., Fill: 100 lbs. min.  |
| Tear Strength ASTM D-2261       | Warp: 22 lbs. min., Fill: 40 lbs. min.  |
| Seam Slippage ASTM D-4034       | Warp: 37 lbs. min., Fill: 65 lbs. min.  |
| Brush Pilling ASTM D-3511       | Class 5.0 min.  |
| Colorfastness to Light AATCC-16 | 40 Hours, Class 4.0   |
| Crocking AATCC-8                | Dry: Class 4.0, Wet: Class 3.0  |
| Antimicrobial                   | INCASE fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface. |

### Flammability\*

|  |         |
|--|---------|
| California Technical Bulletin 117-2013 Section 1 | Passed  |
| UFAC   | Class 1 |
| NFPA 260   | Class 1 |

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.

This product is produced using 100% recycled fiber.



2420 Long Lake Road  
Roseville, MN 55113-7133

Phone: 651-361-7500  
Phone: 1-800-MINNCOR (646-6267)

[www.minncor.com](http://www.minncor.com)

To place an order for a sample,  
please contact MINNCOR at 651-361-7500  
or email [customer-service@minncor.com](mailto:customer-service@minncor.com)



C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

[cfstinson.com](http://cfstinson.com)