




63644 Ruby

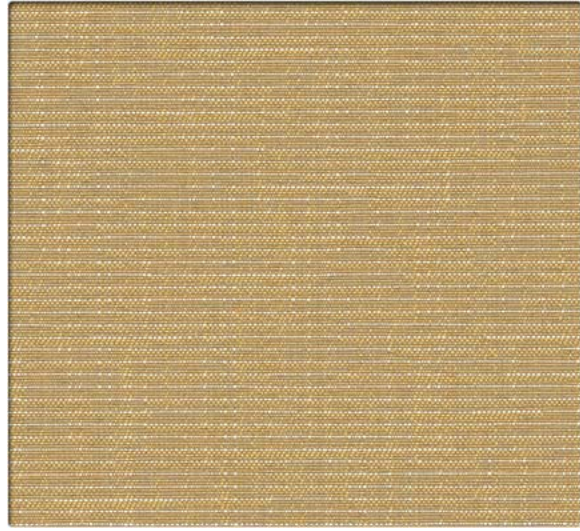

63645 Bamboo

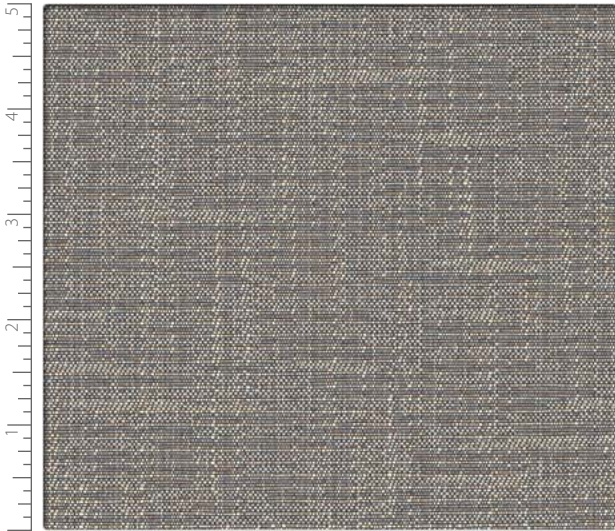


63646 Fog

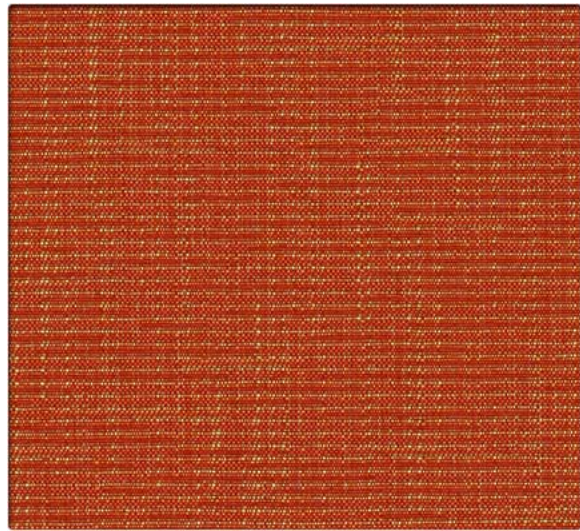


63647 Vermillion




63653 Peat

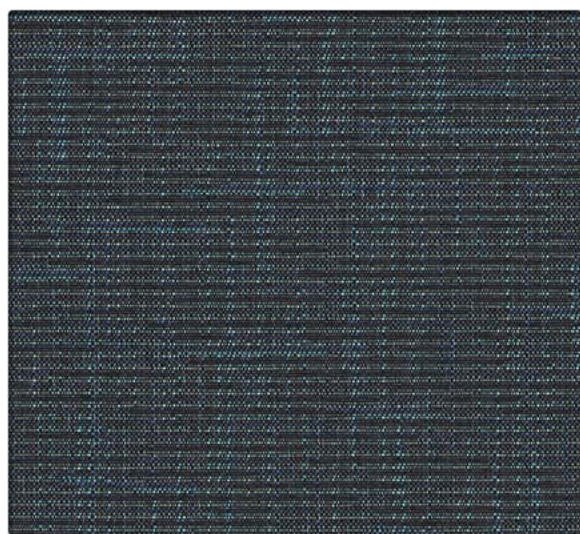


63649 Sapphire

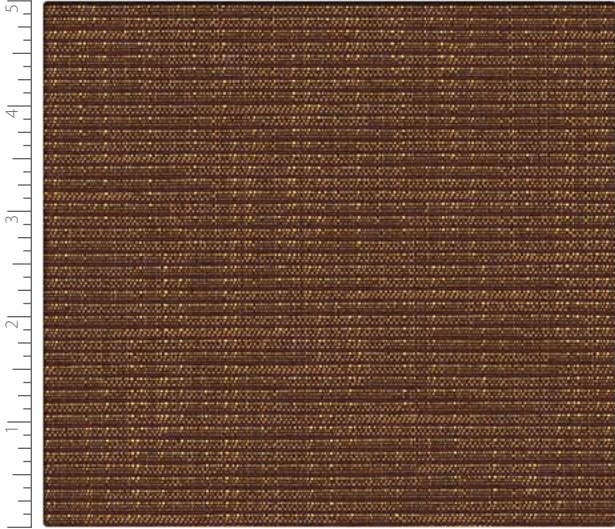


63650 Carob

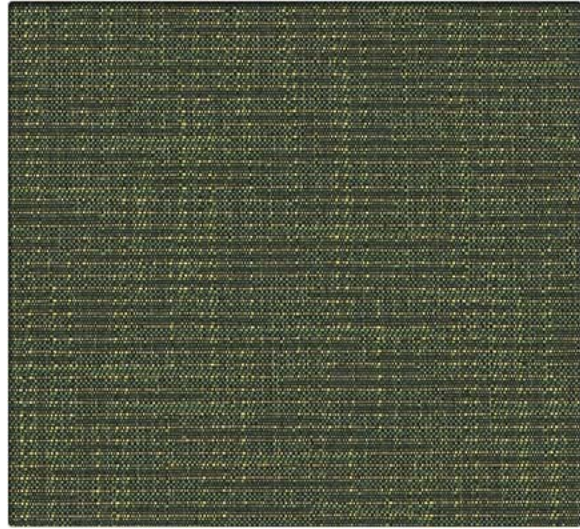

63651 Evergreen

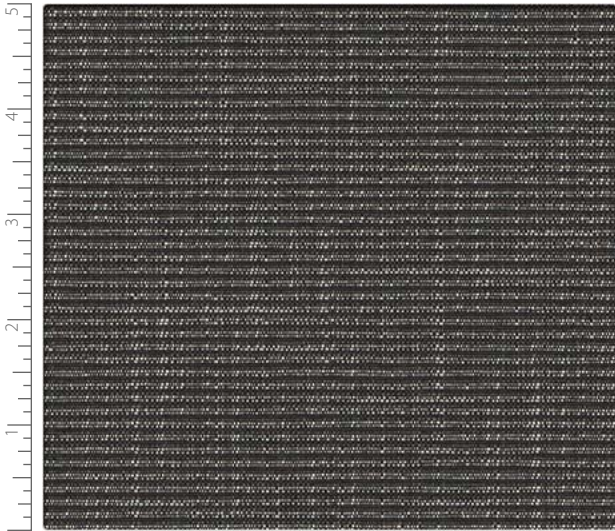

63652 Abyss

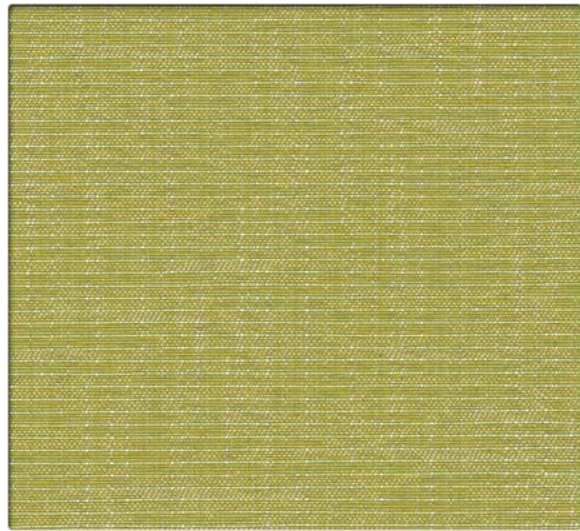

63648 Herb

Dart

PERFORMANCE OR VERTICAL SURFACE FABRIC

Grade Standard

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications



Content	58% Polyester, 27% Post Industrial Recycled Polyester, 15% Post Consumer Recycled Polyester
Finish	Non-PFOA Stain Resistant
Backing	Acrylic
Weight	9.7 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	60 yards

Performance Characteristics

Abrasion Resistance ASTM D-4157	Exceeds 70,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 138 lbs. min., Fill: 239.5 lbs. min.
Tear Strength ASTM D-2261	Warp: 8.73 lbs. min., Fill: 18 lbs. min.
Seam Slippage ASTM D-4034	Warp: 91.4 lbs. min., Fill: 74.4 lbs. min.
Brush Pilling ASTM D-3511	Class 4.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 5.0
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 5.0

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
ASTM E-84 (Adhered) Class A or 1	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.

This product is produced using 43% recycled fiber.



2420 Long Lake Road
Roseville, MN 55113-7133

Phone: 651-361-7500
Phone: 1-800-MINNCOR (646-6267)

www.minncor.com

To place an order for a sample,
please contact MINNCOR at 651-361-7500
or email customer-service@minncor.com



C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com