




MTA83 Slate

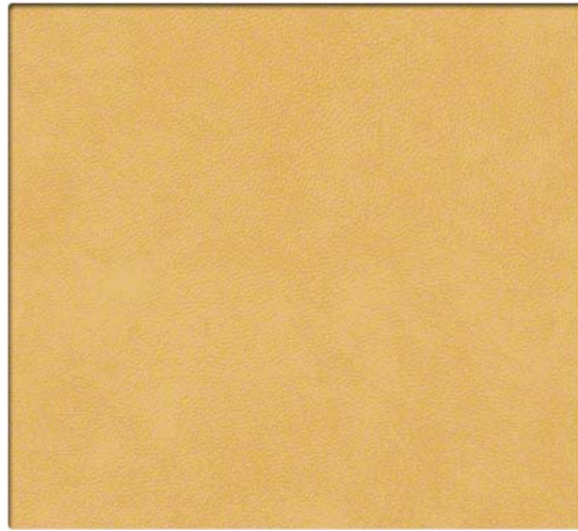


MTA73 Crocus

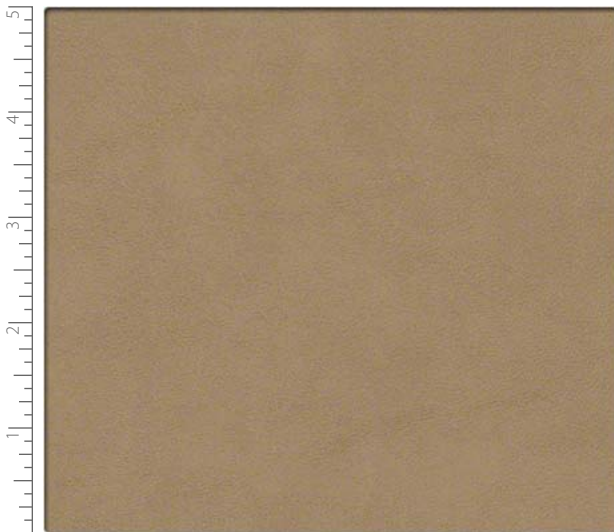

MTA70 Suede

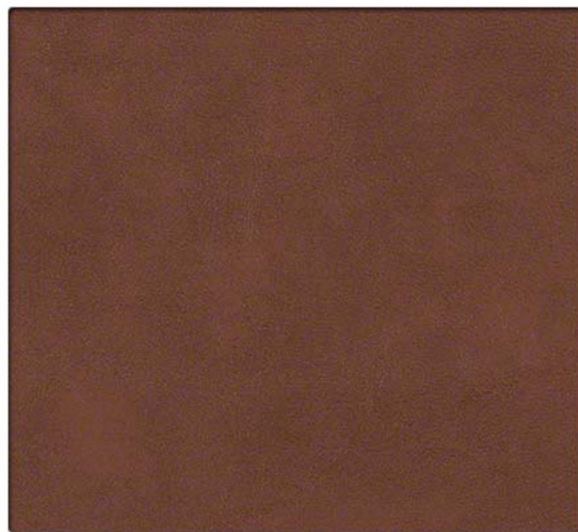


MTA96 Bombay

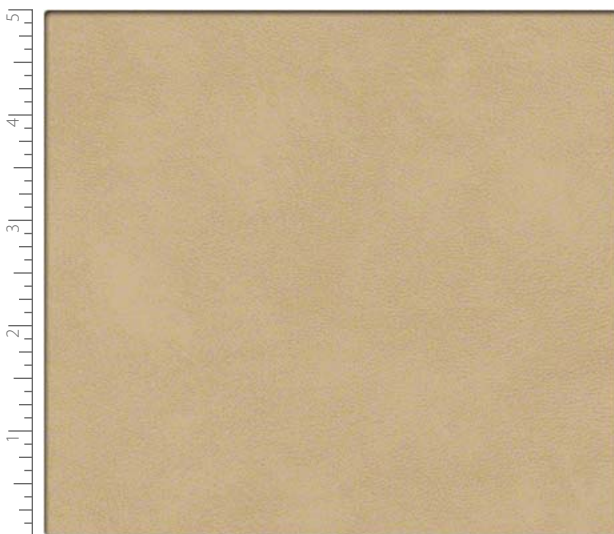


MTA72 Bamboo




MTA93 Chocolate

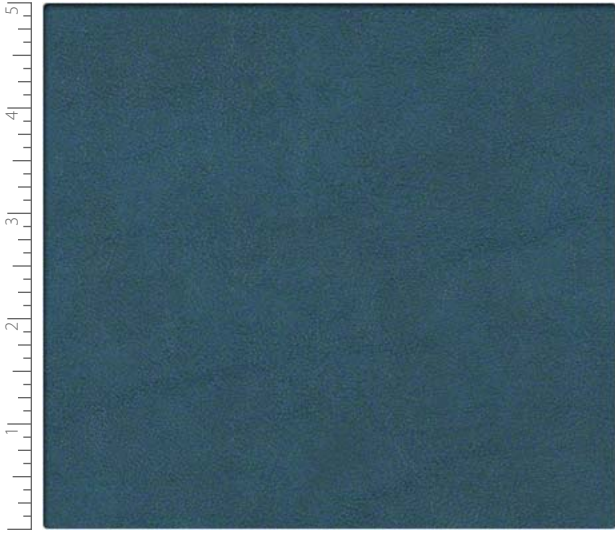


MTA84 Colonial Blue

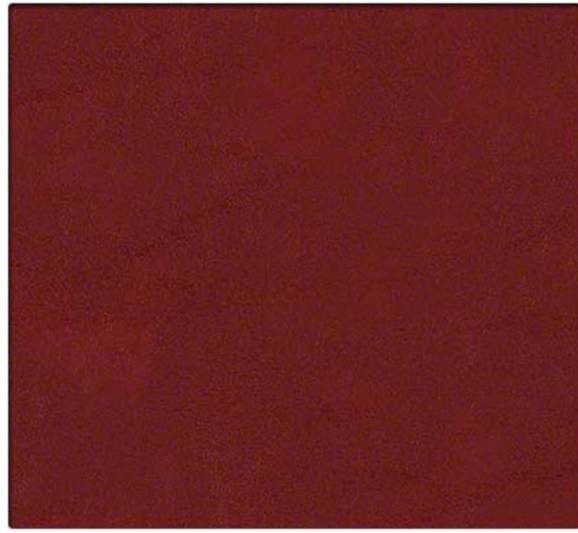

MTA82 Cranberry

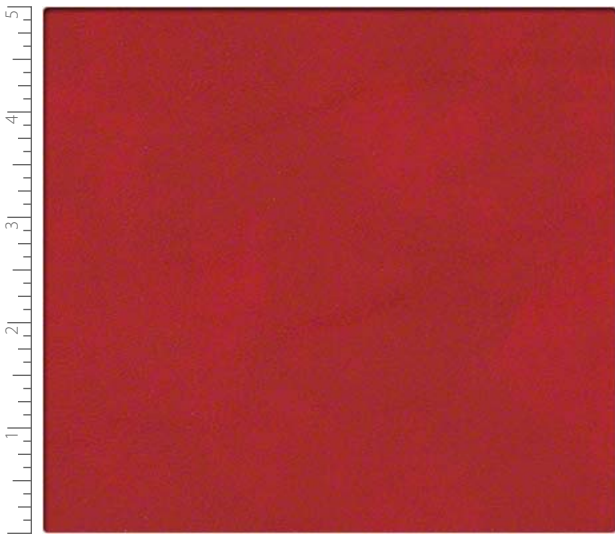

MTA74 Fire Red

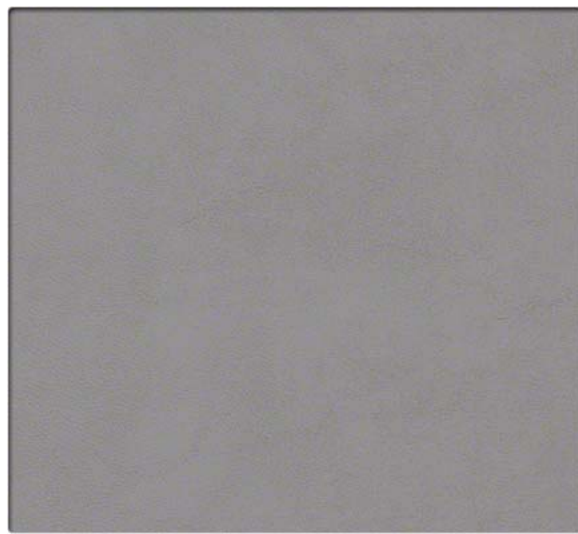


MTA76 Gray




MTA91 Hunter




MTA88 Navy

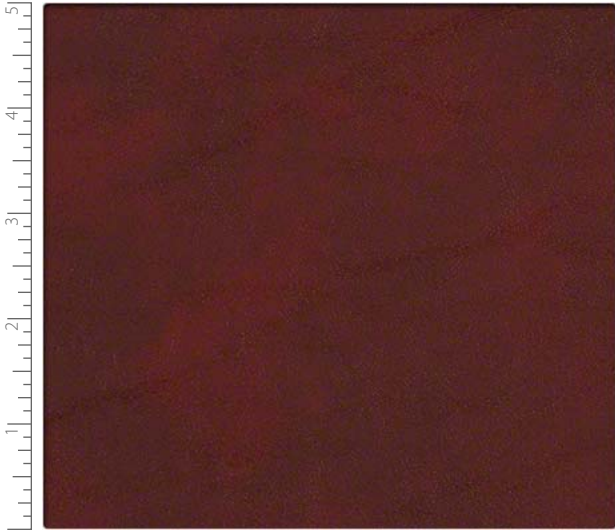

MTA86 Oxblood

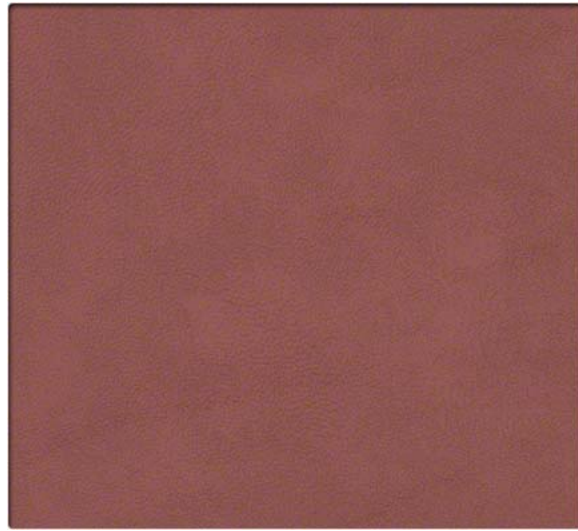

MTA85 Plum

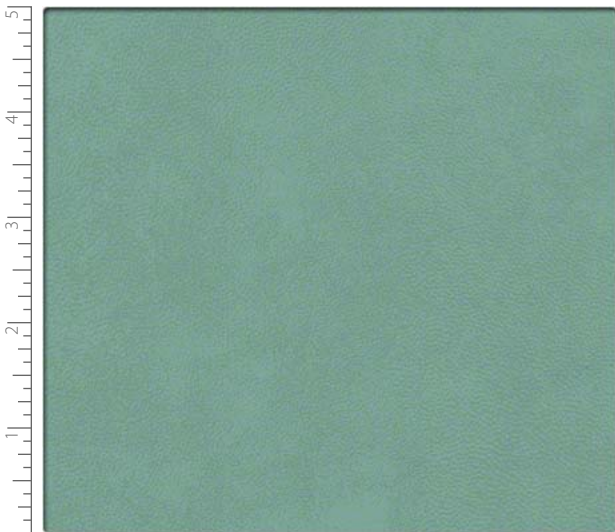

MTA79 Seafoam




MTA95 Shadow




MTA78 Spice




MTA87 Teal

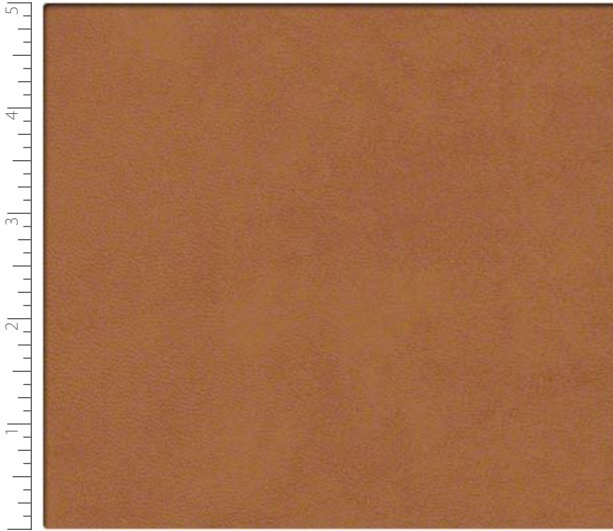


MTA81 Wheat

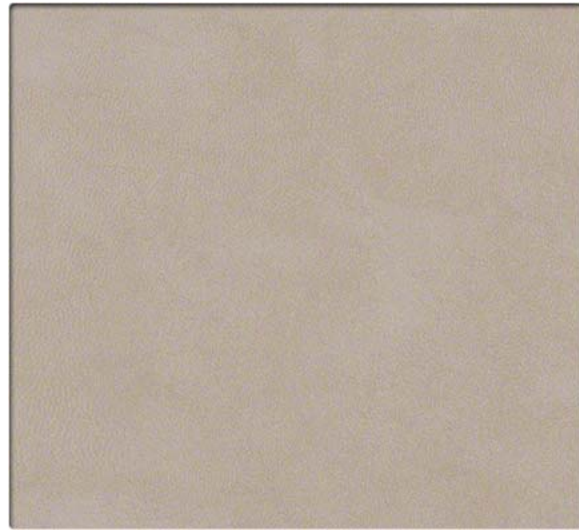


MTA71 Birch

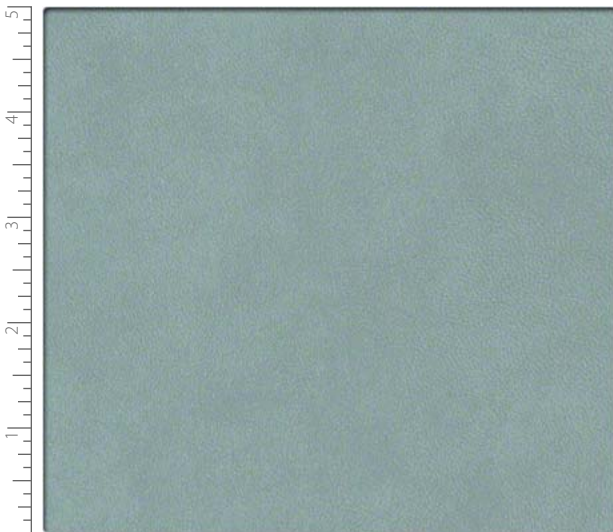

MTA75 Bluestone

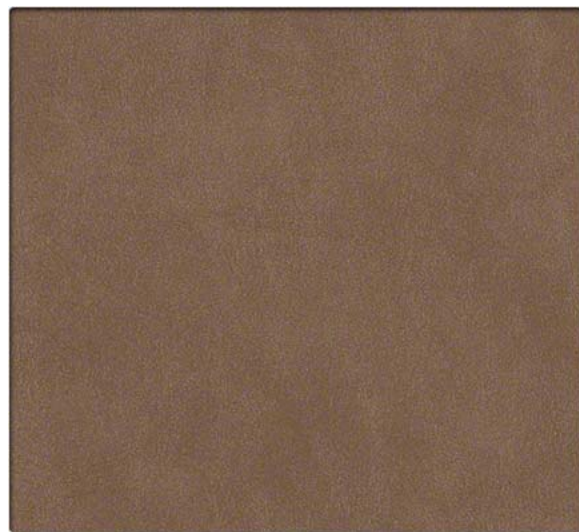


MTA89 Burro

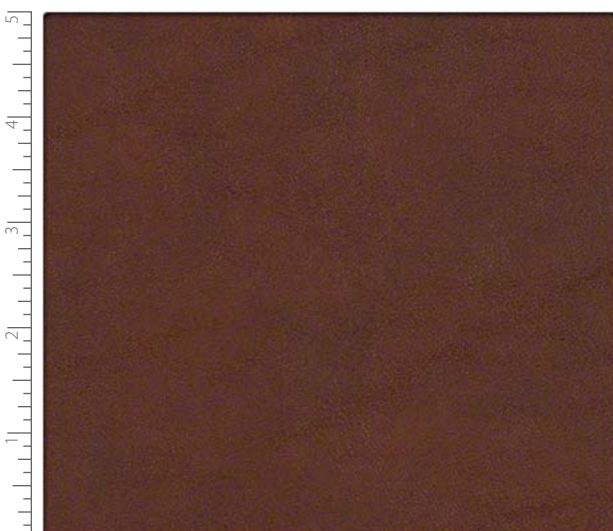


MTA90 Chestnut




MTA92 Charcoal

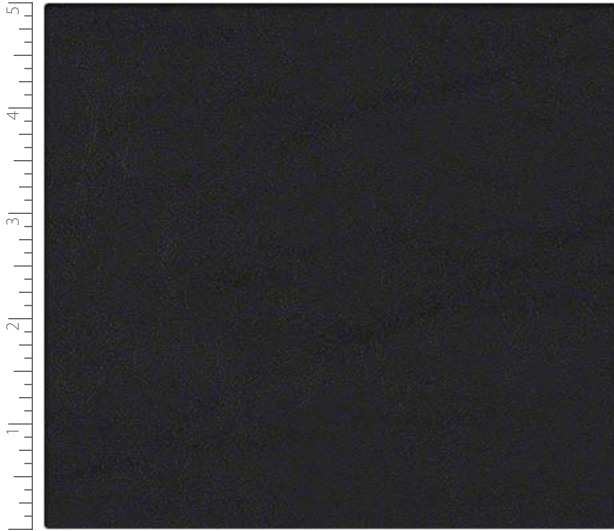

MTA94 Black

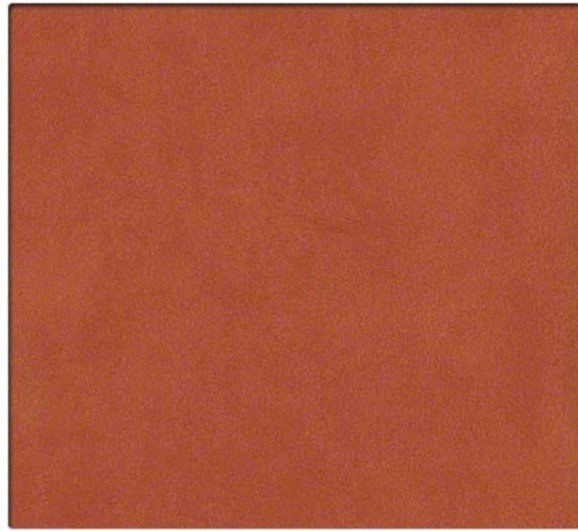

MTA97 Autumn Leaf

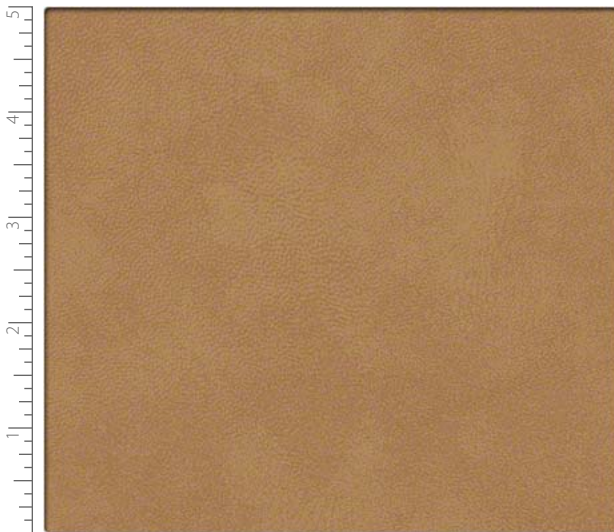

MTA77 Almond



MTA80 Azure

### Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable
- Enhanced fade resistance

### Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

For additional cleaning information visit [cfstinson.com](http://cfstinson.com)

For complete specifications visit [cfstinson.com](http://cfstinson.com)

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

### Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester
Weight	36 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

### Performance Characteristics

Abrasion Resistance CFFA-1	Exceeds 1,300,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 110 lbs. min., Fill: 85 lbs. min.
Tear Strength CFFA-16	Warp: 25 lbs. min., Fill: 25 lbs. min.
Colorfastness to Light CFFA-2	600 Hours, Class 5.0
Crocking CFFA-7	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

### Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
NY / NJ Port Authority (FTMS 191-5903)	Passed
Boston Fire Code BFD 1X-1	Passed
FAA 25.853 (b)	Passed
NFPA 701 (Small Scale)	Passed
Federal Specification CID A-A-2950	Passed
MVSS 302	Passed
BIFMA	Class 1
IMO A.652(16) 8.2 & 8.3	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.



2420 Long Lake Road  
Roseville, MN 55113-7133

Phone: 651-361-7500  
Phone: 1-800-MINNCOR (646-6267)

[www.minncor.com](http://www.minncor.com)

To place an order for a sample,  
please contact MINNCOR at 651-361-7500  
or email [customer-service@minncor.com](mailto:customer-service@minncor.com)



C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

[cfstinson.com](http://cfstinson.com)