



PR400 Black Satin

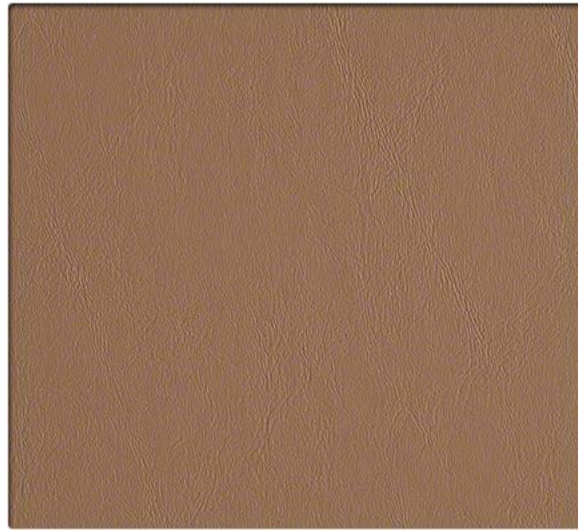


PR430 Velvet Brown

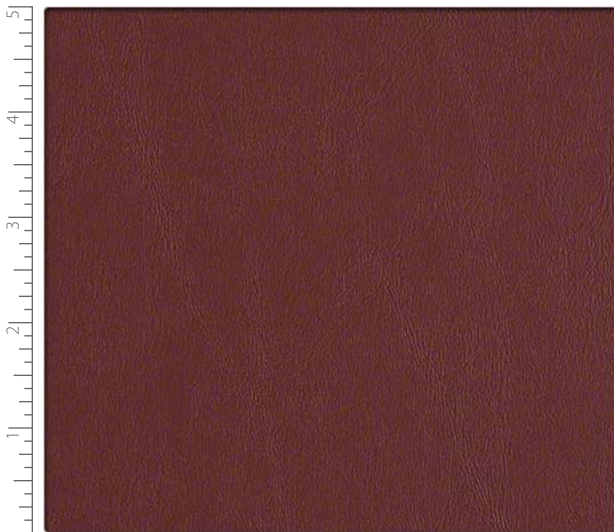


PR360 Cabernet




PR510 Cocoa

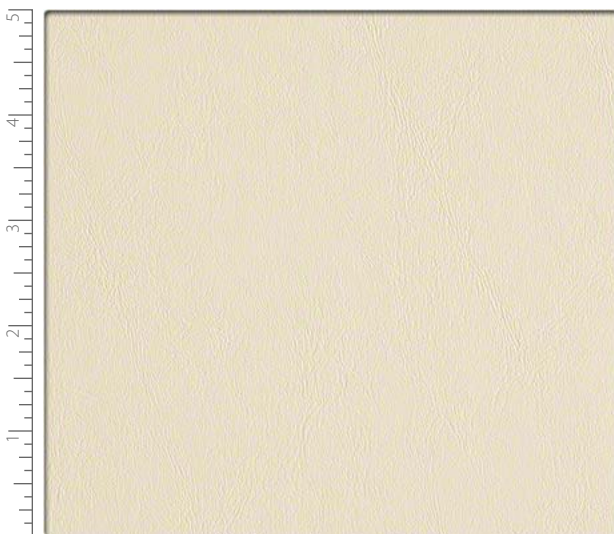


PR440 Cream

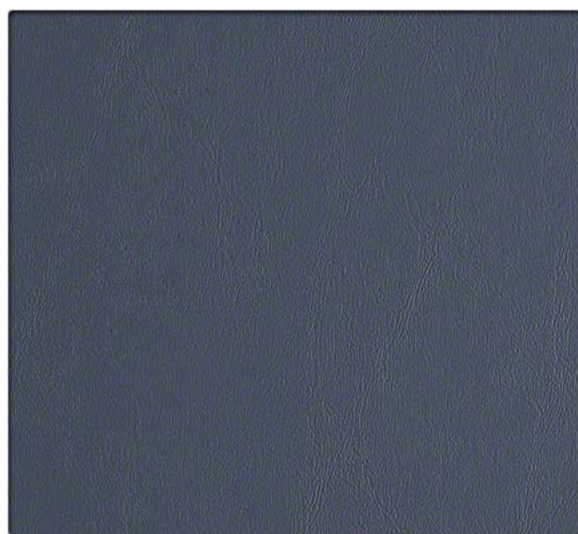


PR550 Deep Sapphire

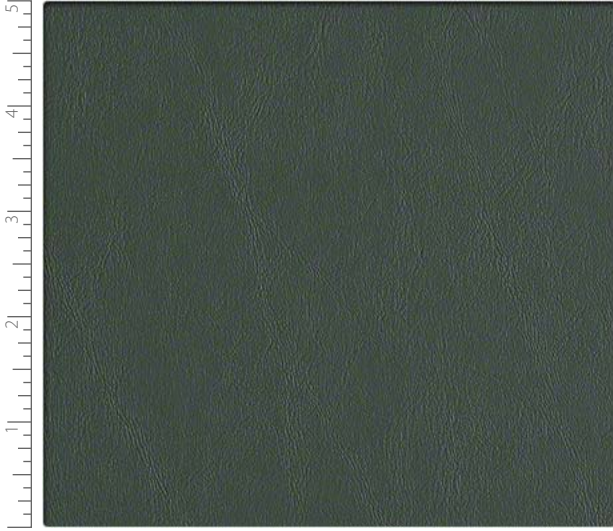


PR490 Deep Sea

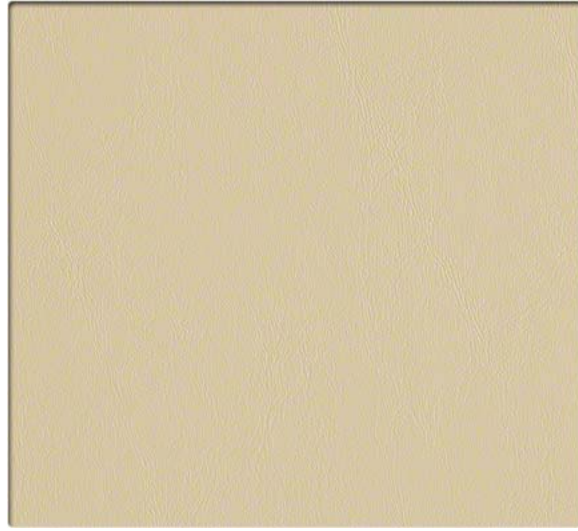


PR480 Doeskin

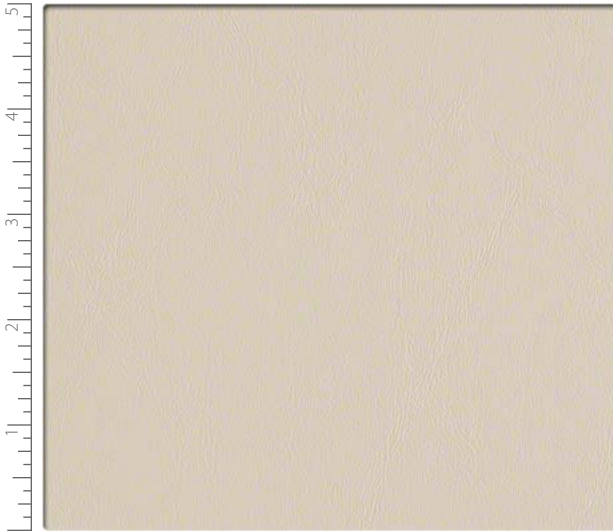

PR350 Fawn

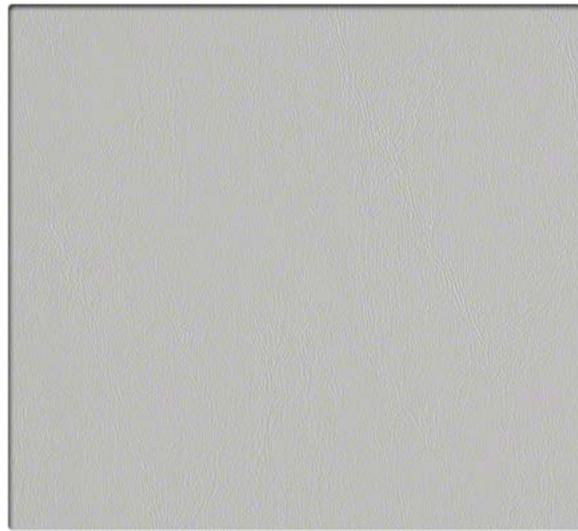


PR370 Feather

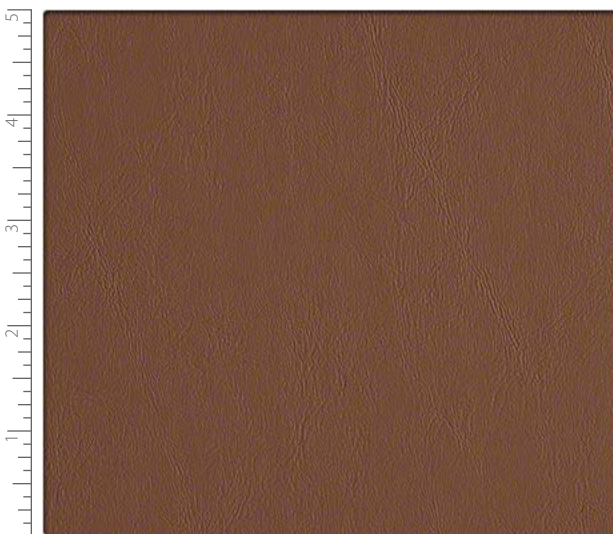


PR380 Harness




PR530 Ivy

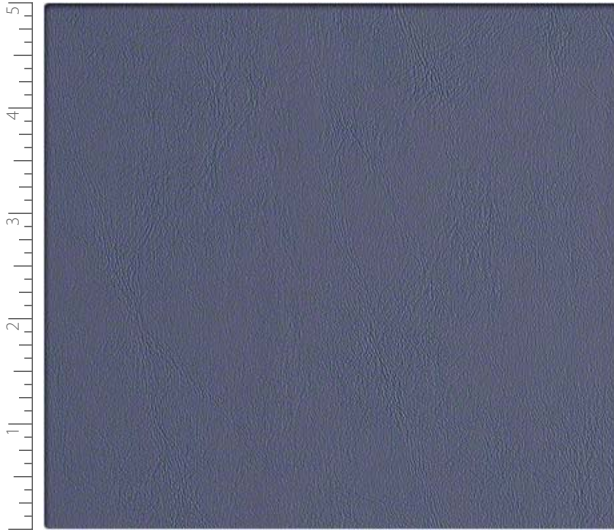


PR500 Lake Louise

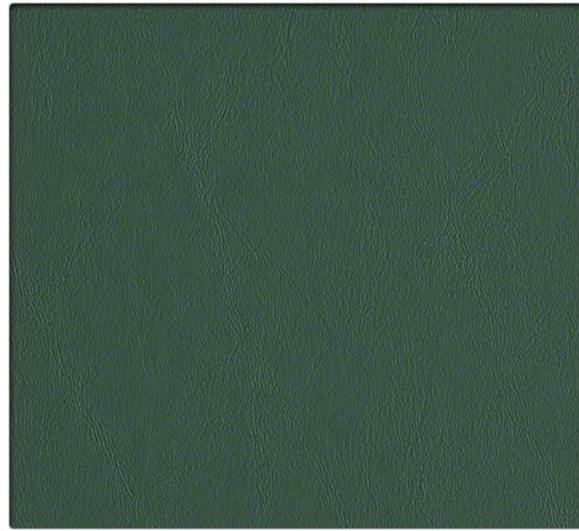


PR390 Laurel

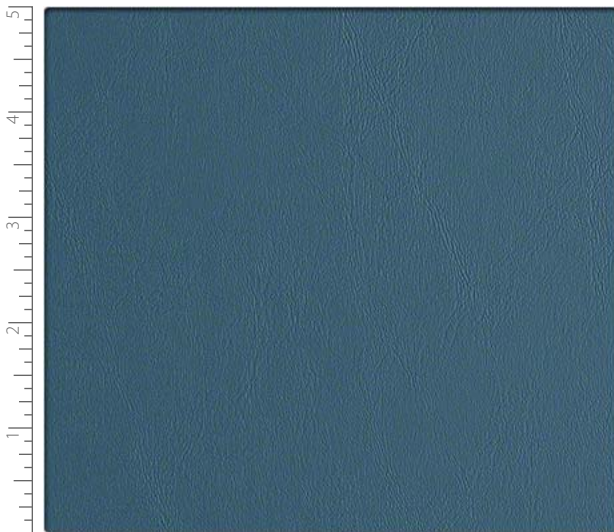


PR540 Mallard Blue

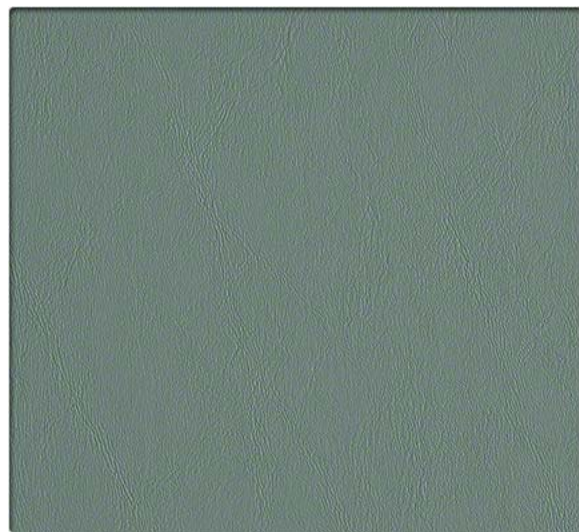


PR450 Mint Leaf

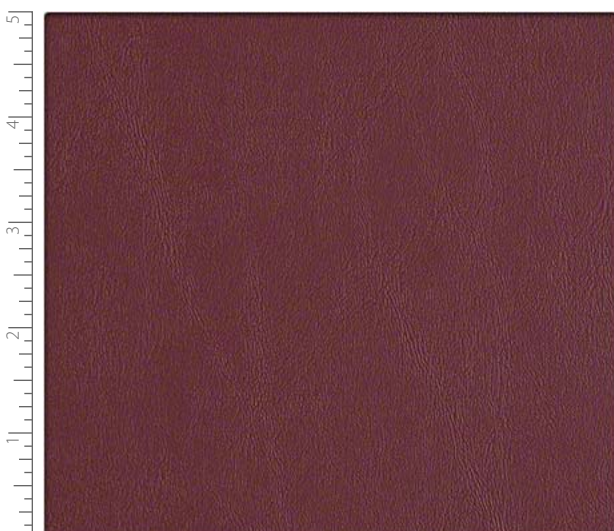


PR410 Mulberry

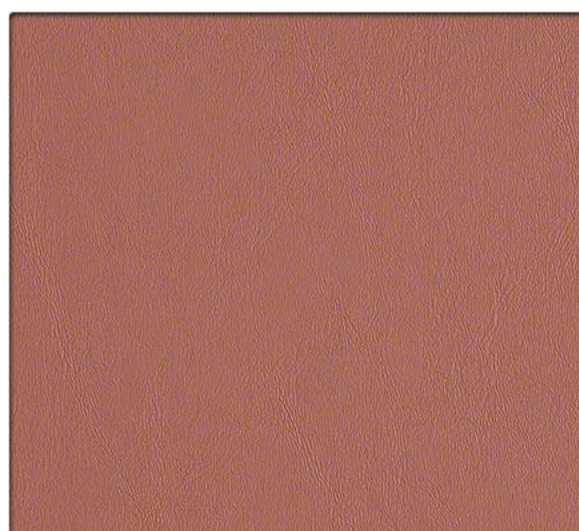


PR420 Rose Blush

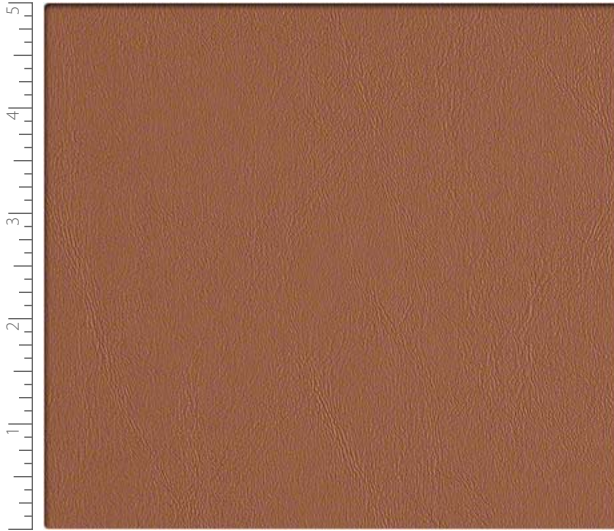


PR520 Saddle

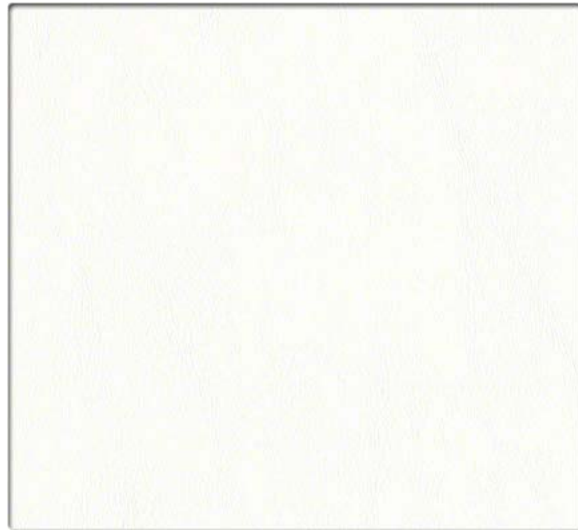

PR340 Soft White

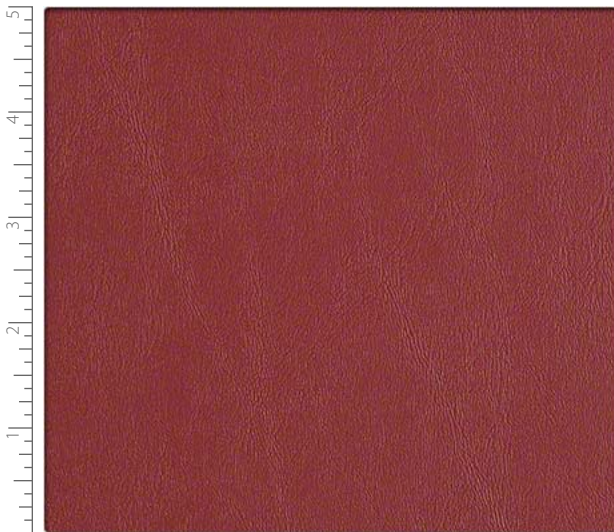

PR470 Tapestry Red

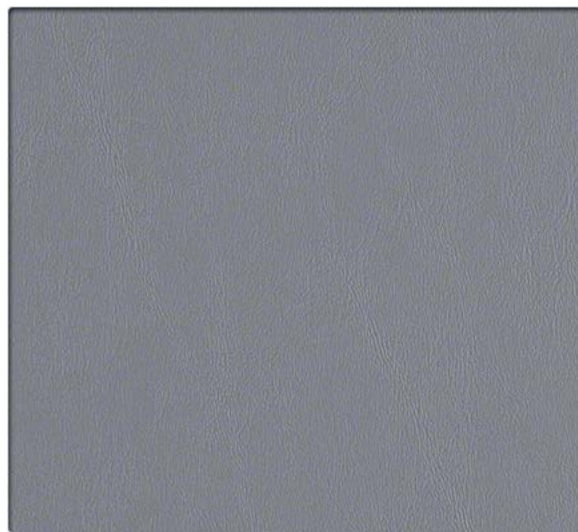

PR460 Blue Fog

Naugasoft

VINYL SEATING

Grade Standard

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

Specifications



| | |
|-----------|--|
| Content | Vinyl Surface with Polyester Backing |
| Finish | Advanced BeautyGard® soil and stain protection |
| Backing | Polyester |
| Weight | 28.2 oz./lin. yd. ± 1.0 oz. |
| Width | 54 inches |
| Roll Size | 35 yards |

Performance Characteristics

| | |
|----------------------------|--|
| Abrasion Resistance CFFA-1 | Exceeds 1,000,000 double rubs - heavy duty |
| Break Strength CFFA-17 | Warp: 70 lbs. min., Fill: 60 lbs. min. |
| Tear Strength CFFA-16 | Warp: 15 lbs. min., Fill: 15 lbs. min. |
| Fluid Barrier | Inherent Fluid Barrier |
| Antimicrobial | This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface. |

Flammability*

| | |
|--|---------|
| California Technical Bulletin 117-2013 Section 1 | Passed |
| NFPA 260 | Class 1 |
| MVSS 302 | Passed |
| BIFMA | Class 1 |
| May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components. | |



2420 Long Lake Road
Roseville, MN 55113-7133

Phone: 651-361-7500
Phone: 1-800-MINNCOR (646-6267)

www.minncor.com

To place an order for a sample,
please contact MINNCOR at 651-361-7500
or email customer-service@minncor.com



C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com