




SP67 Barolo

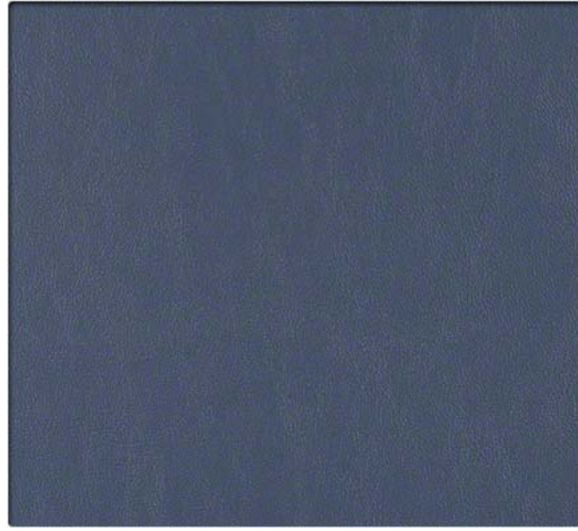


SP52 Marlin

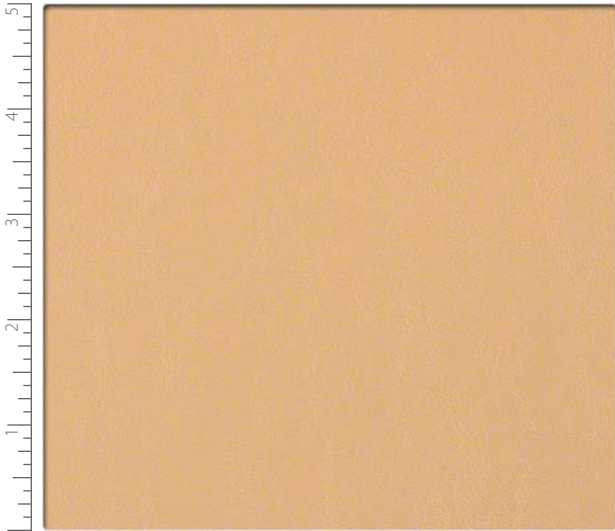


SP53 Impala

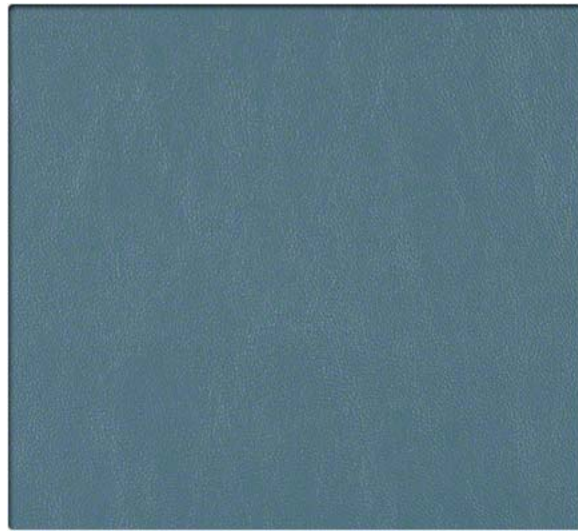


SP51 Niagara

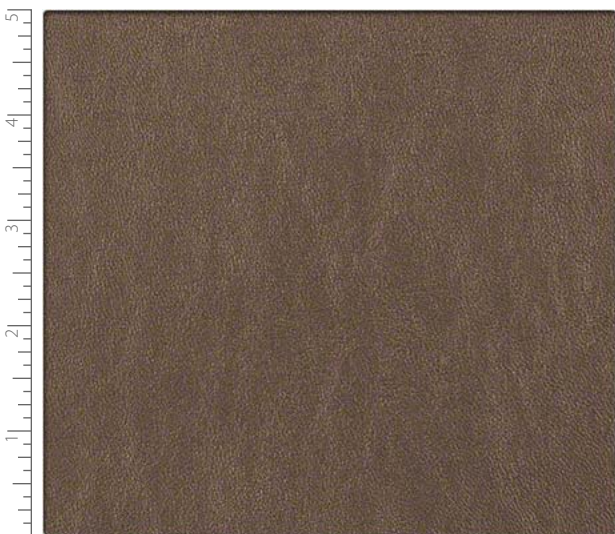


SP40 Teak

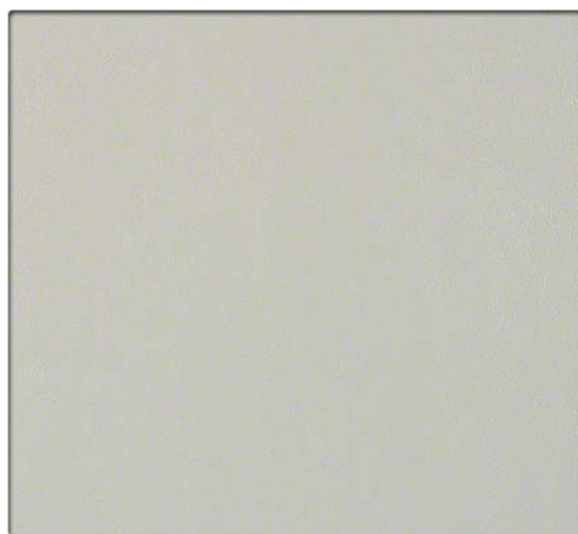


SP44 Subtle Green

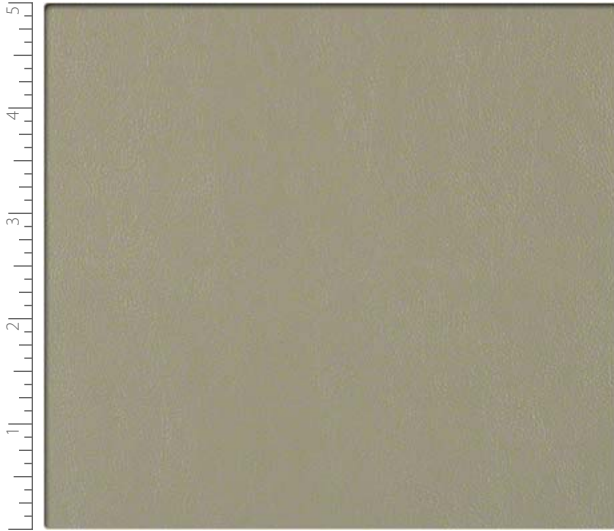


SP55 Elm

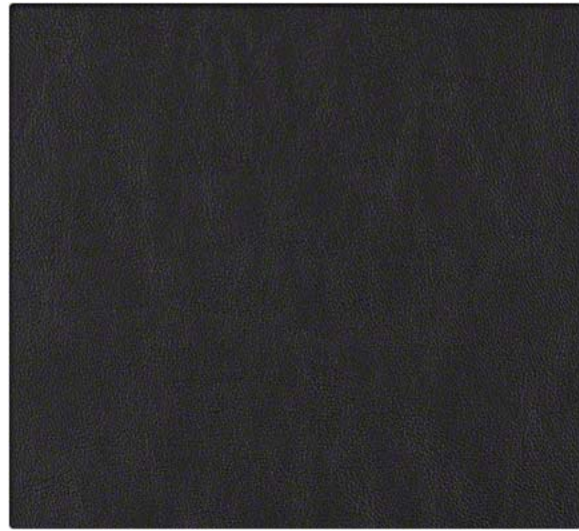


SP62 Black

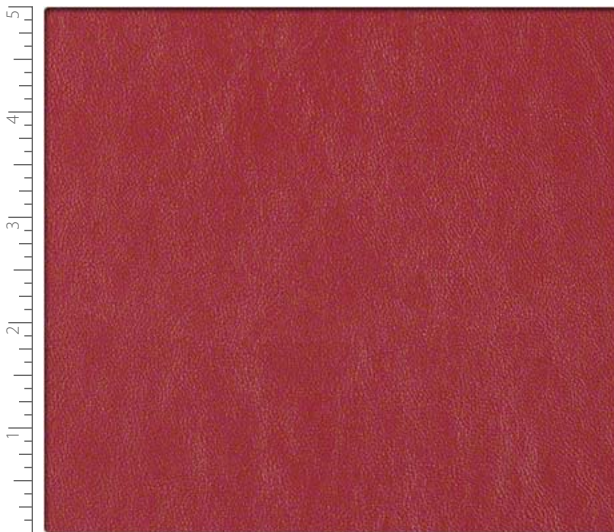


SP64 Berry

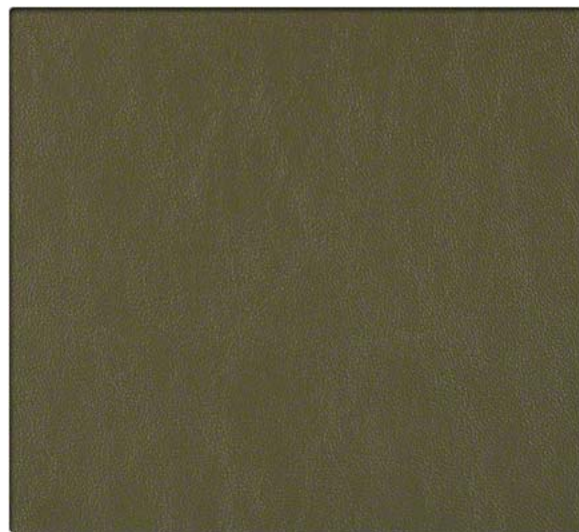


SP66 Tarragon

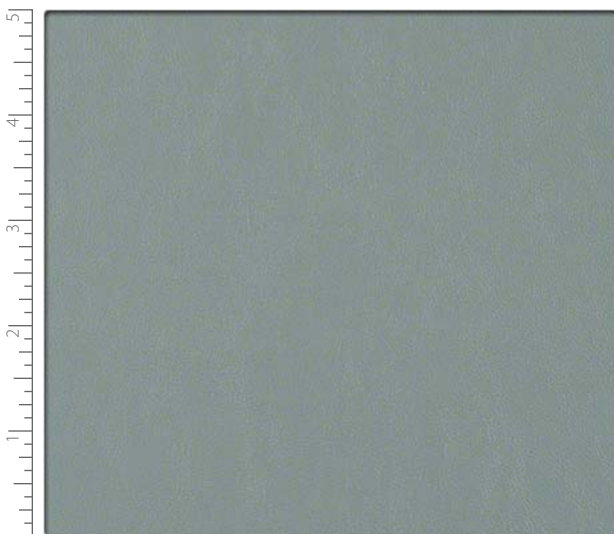


SP50 Hydro

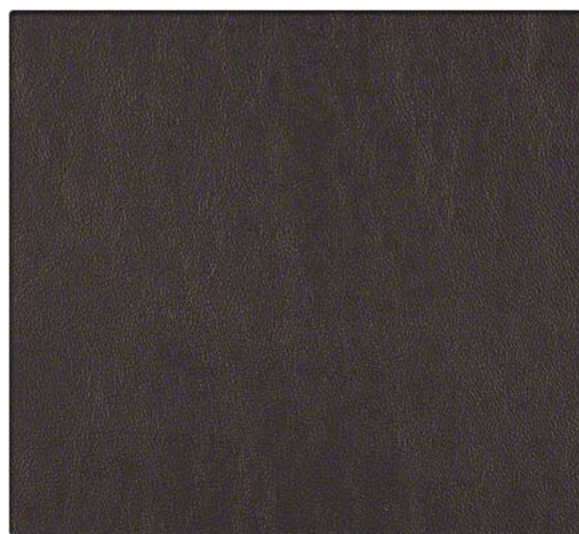


SP68 Demitasse

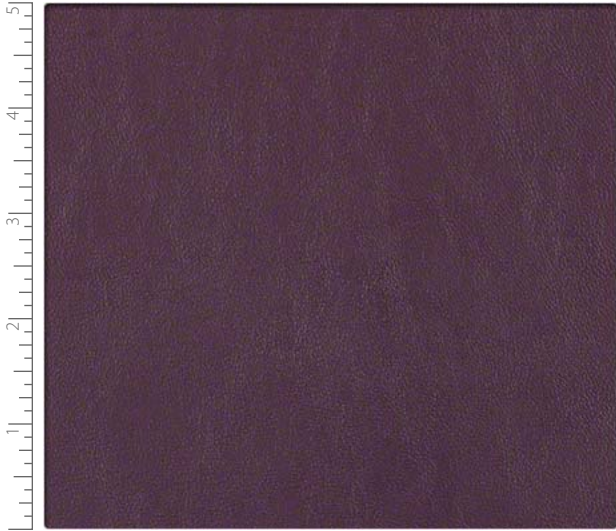


SP63 Plum

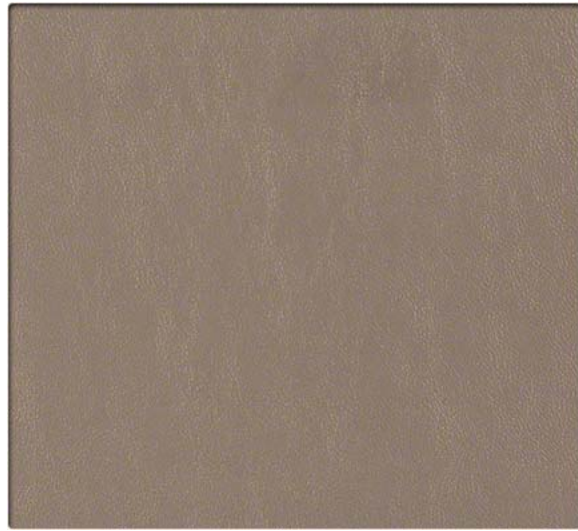


SP60 Toffee

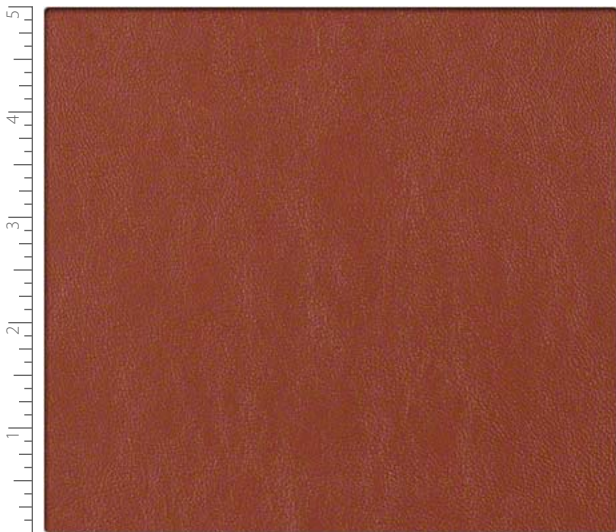


SP65 Picante

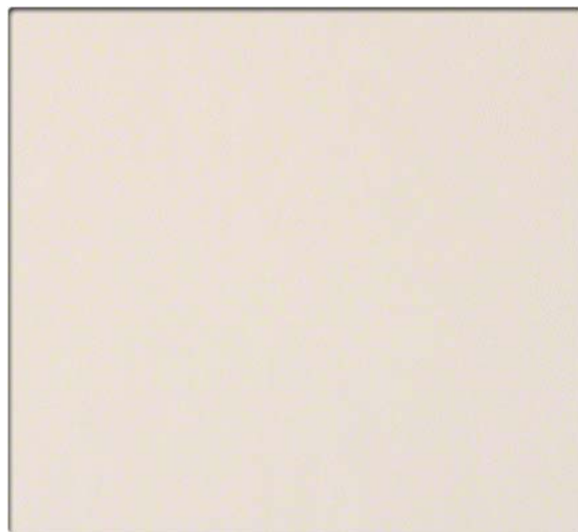


SP42 Cream

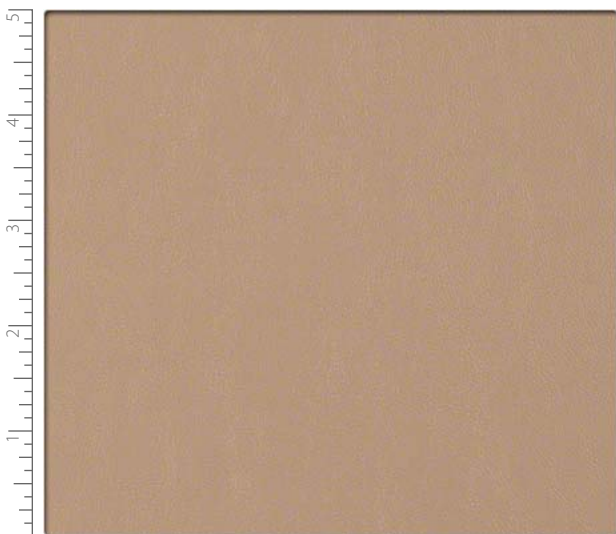


SP54 Praline

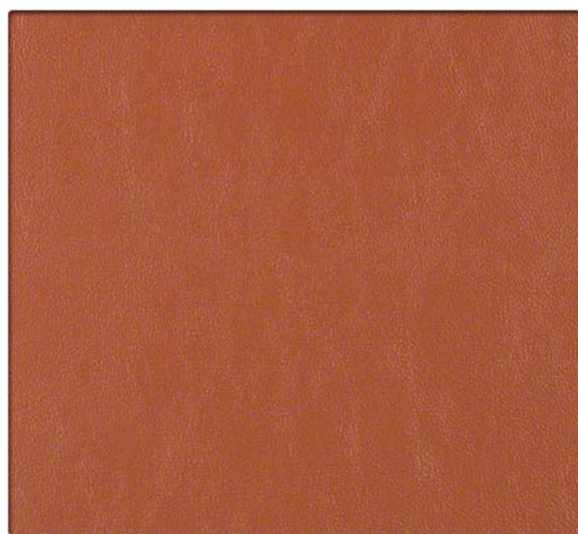


SP59 Canyon

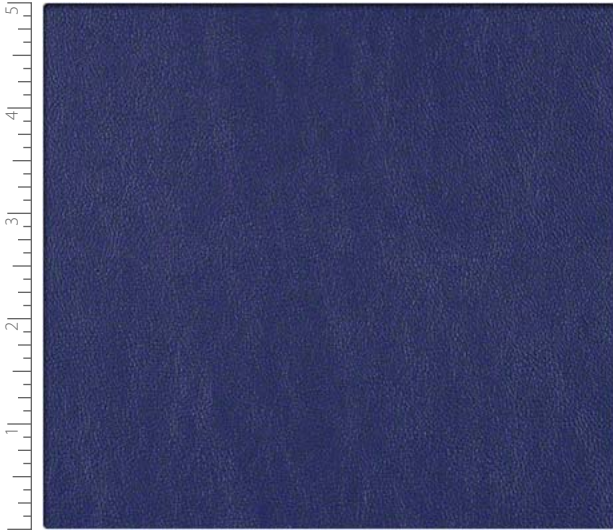


SP58 Olympian

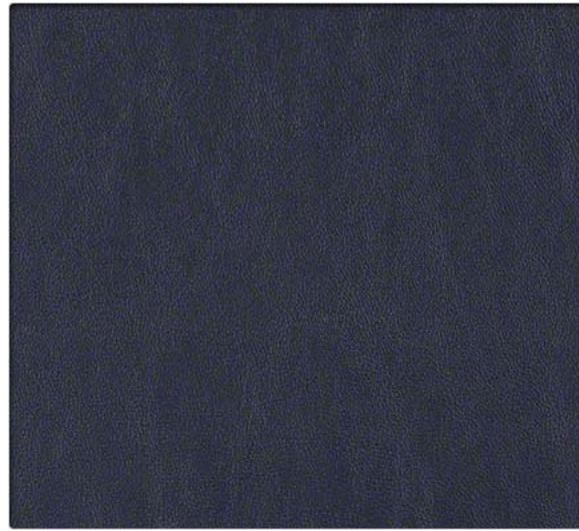


SP57 Navy

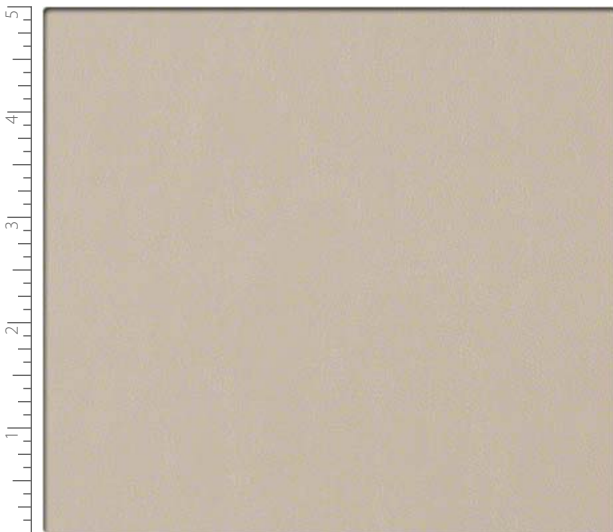


SP43 Chateau

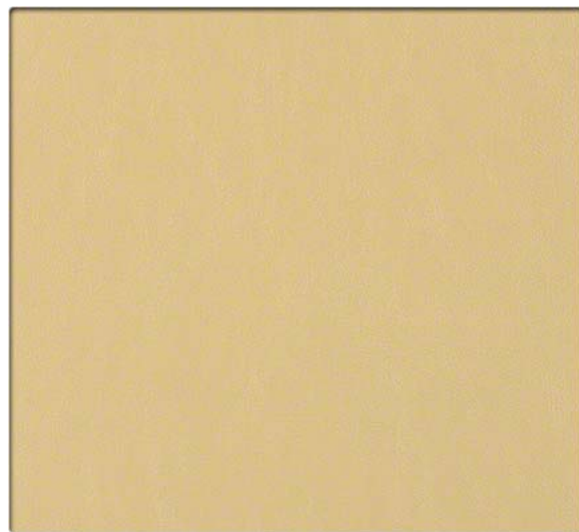


SP47 Bamboo

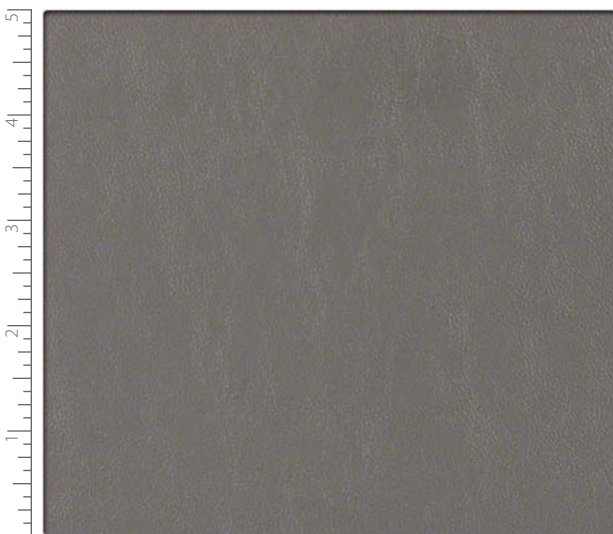


SP46 Castlerock

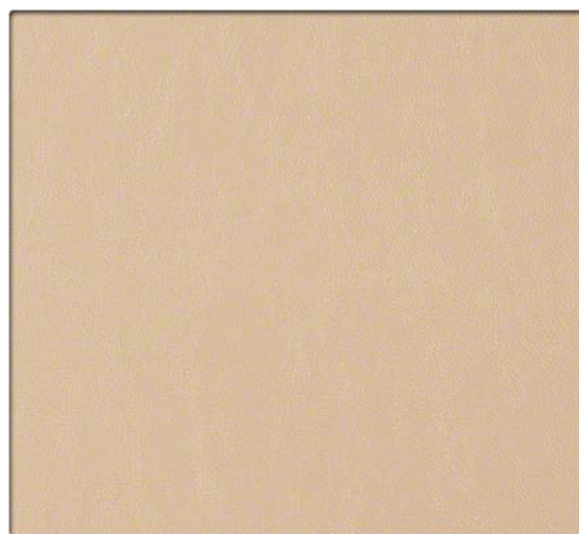

SP48 Sand

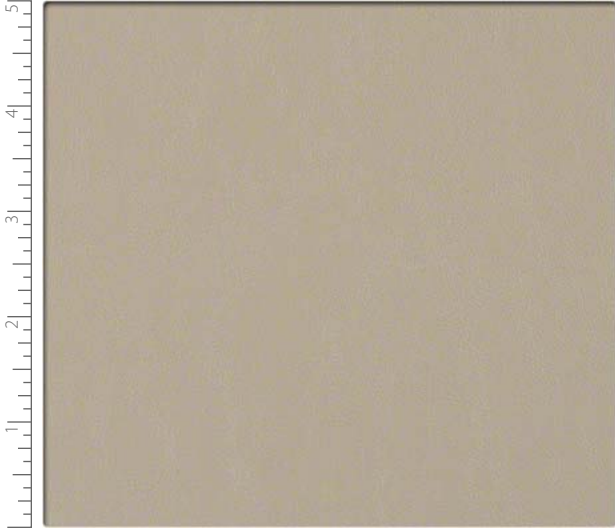

SP49 Fog

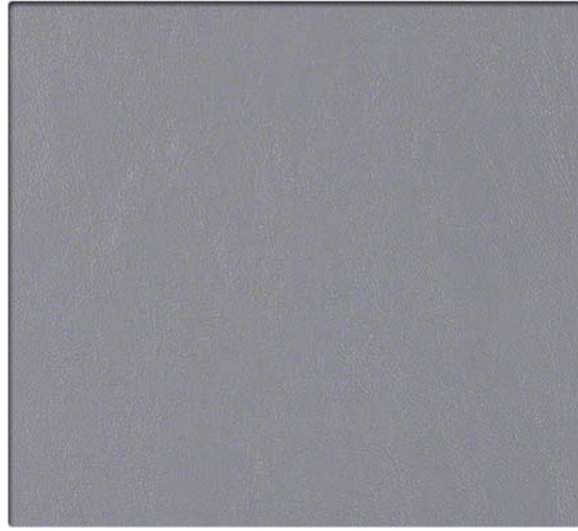

SP45 Citadel

# Simplicity

VINYL SEATING

Grade Standard

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable
- Enhanced fade resistance

## Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 20% may be used for more difficult stains.

For additional cleaning information visit [cfstinson.com](http://cfstinson.com)

For complete specifications visit [cfstinson.com](http://cfstinson.com)

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

## Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester
Weight	32 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

## Performance Characteristics

Abrasion Resistance CFFA-1	Exceeds 200,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 121 lbs. min., Fill: 72 lbs. min.
Tear Strength CFFA-16	Warp: 18 lbs. min., Fill: 18 lbs. min.
Colorfastness to Light CFFA-2	1000 Hours, Class 5.0
Crocking CFFA-7	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
NY / NJ Port Authority (FTMS 191-5903)	Passed
Boston Fire Code BFD 1X-1	Passed
FAA 25.853 (a)	Passed
MVSS 302	Passed
IMO A.652(16) 8.2 & 8.3	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.



2420 Long Lake Road  
Roseville, MN 55113-7133

Phone: 651-361-7500  
Phone: 1-800-MINNCOR (646-6267)

[www.minncor.com](http://www.minncor.com)

To place an order for a sample,  
please contact MINNCOR at 651-361-7500  
or email [customer-service@minncor.com](mailto:customer-service@minncor.com)

**Stinson**

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

[cfstinson.com](http://cfstinson.com)